

4500 Series Thin Clients

4K Value & Security Class

Model Numbers: 4572, 4510

Industry Leading VDI Performance

The 4500 Series is a new, highly secure model to the 10ZiG product lineup. The 4500 Series is small in size yet surprisingly powerful, supporting a 4K dual monitor setup at a value price point. Featuring a 1 x DisplayPort and 1 x HDMI combination along with a rare industry find of a Fiber option, the 4500 Series is an ideal choice for Federal and Military as well as Enterprise Organizations in verticals such as Finance and Healthcare needing the absolute highest levels of security in their VDI environment.


The 10ZiG 4500 Thin Client is available with 10ZiG PeakOS™ (Linux), Windows 10 IoT (W10 IoT) and is VMware, Citrix and Microsoft Ready.



- ▶ Intel Dual Core N3060 1.6 GHz (2.48 GHz Burst Frequency)
- ▶ Optional Fiber
- ▶ 1 x DisplayPort and 1 x HDMI combination
- ▶ 5 x USB (2 x USB 3.0)
- ▶ Optional Wireless (External Antenna)
- ▶ Optional VESA and ARM Mount
- ▶ Optional TPM 2.0 (Windows Only)
- ▶ Optional TAA Compliance
- ▶ 4K UHD with Dual Monitor Support*
- ▶ 802.1x Network Authentication
- ▶ FREE Centralized Management via 10ZiG Manager



4500 Series Thin Clients

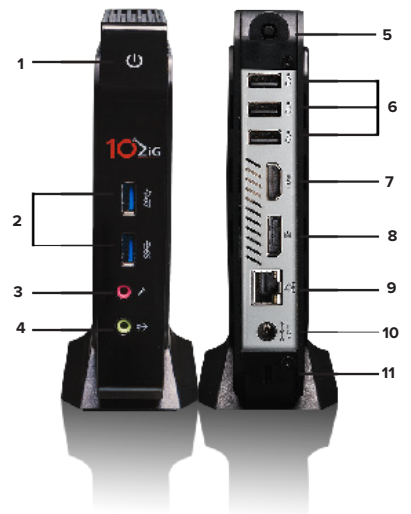

| System | |
|--------------------|------------------------------------------------------------------------------------------------------------------------|
| Management | 10ZiG Manager |
| Form Factor | Ultra Mini |
| Processor | Intel Dual Core N3060 1.6 GHz (2.48 GHz Burst Frequency) |
| Processor Graphics | Intel HD Graphics |
| Dimensions | |
| Device | 5.5"(D) x 2.4"(W) x 6.6"(H) - 140mm x 61mm x 168mm |
| Weight | 1.39 lbs (630g) |
| Connections | |
| Ports | 1 x DisplayPort, 1 x HDMI, 2 x USB 3.0, 3 x USB 2.0, 1 x Mic In, 1 x Line Out, 1 x LAN (RJ45 or Fiber option), DC Jack |
| Video/Resolution | 3840 x 2160 @ 30Hz / 2560 x 1600 @ 60Hz (2 monitors at 4K UHD) |
| Networking | |
| Wireless | Optional (802.11 a/b/g/n/ac External Antenna) |
| Fiber OR Ethernet | Fiber option OR standard RJ45 LAN (10/100/1000 Base-T) |
| Environmental | |
| Operating Temp. | 32°-95°F (0°-35°C), 20-80% non-condensing humidity |
| Power | 3-4 Average Watt Consumption, DC-12V/2A External Power Adapter |

SPECIFICATIONS

- | | |
|--------------------------------------|-------------------------------|
| 1. Power Button | 7. HDMI Port |
| 2. USB 3.0 (2) | 8. DisplayPort |
| 3. Mic In | 9. RJ45 LAN or Fiber LAN Port |
| 4. Line Out | 10. DC Jack |
| 5. Reserve hole for external antenna | 11. Kensington Lock |
| 6. USB 2.0 (3) | |

4572

4510

Operating System

PeakOS™ (Linux)

Windows 10 IoT

Memory

| | | |
|---------|------------------------|-------------------------|
| RAM | Std: 2GB Max: 8GB | Std: 4GB Max: 8GB |
| Storage | Std: 4GB Max: 256GB | Std: 16GB Max: 256GB |

Software

| | | |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Software Applications | Firefox, Google Chrome**, Adobe Reader, Putty, Citrix Receiver, VMware Horizon Client, FreeRDP Client, Parallels Client, VNC (Shadowing), GStreamer, OpenOffice**, iSeries/5250 Emulation**, JRE (Java Runtime Engine) | Internet Explorer, Citrix Receiver, RDP, VMware Horizon Client, VNC (Shadowing), Windows Media Player, Amazon WorkSpaces, Parallels RAS Client, Spice Client, JRE (Java Runtime Engine), Microsoft Silverlight, Workspot Client |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

| | | |
|----------------------------------|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| VDI Connection Brokers Supported | VMware Horizon (Blast Extreme, PCoIP, RDP), Citrix XenApp & XenDesktop, RDP, Parallels RAS | VMware Horizon (Blast Extreme, PCoIP, RDP), Citrix XenApp & XenDesktop, RDP, Parallels RAS, Amazon WorkSpaces, Workspot VDI |
|----------------------------------|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|

*4K performance dependent upon your current VDI Infrastructure and the necessary minimum requirements to support it.

**Optional Application may require alternative model; please speak to a sales representative to confirm.



Americas P: +1 (866) 865-5250
 EMEA P: +44 (0) 116 214 8650
 APAC P: +61 2 80027421
 DE P: +49(0) 6724 9304 45

E: info@10ZiG.com
 E: info@10ZiG.eu
 E: info@10ZiG.com.au
 E: vertrieb@10zig.de

W: www.10ZiG.com

