




Thin Client **Atrust t180WB**

Atrust t180WB is a WE8S (Windows Embedded 8 Standard) based thin client computer. Developed by Atrust, the ACS (Atrust Client Setup) software is also built in to help effective management of t180WB. With the support of Citrix ICA/HDX, Microsoft RDP and VMware® Horizon View™, t180WB can be used to create virtual and session-based desktop experiences from many remote desktop capable operating systems. t180WB offers a rich computing experience where applications look, feel, and behave as local devices, including high-definition multimedia content.

- 1 Power LED**
Indicates the status of power.
- 2 Power Button**
Press to turn on/off the client.
- 3 Microphone Port**
Connects to a microphone.
- 4 Headphone Port**
Connects to a headphone or a speaker system.
- 5 USB 2.0 Port**
Connects to a USB device.
- 6 Kensington Lock Slot**
Attach the t180WB to a permanent object with the Kensington slot and a security cable.
- 7 DVI-I Port**
Connects to a monitor.
- 8 DVI-D Port**
Connects to a monitor.
- 9 USB 2.0 Port**
Connects to a keyboard, mouse, or USB device.
- 10 USB 3.0 Port**
Connects to a keyboard, mouse, or USB device.
- 11 LAN Port**
Connects to a host server through a LAN switch.
- 12 DC IN**
Connects to an AC adaptor.

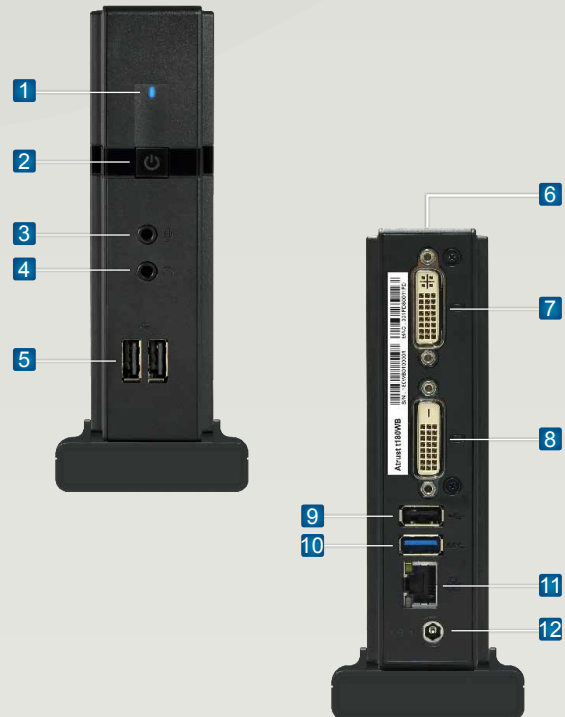

Atrust t180WB Features

- ▶ Dual display support
- ▶ Durable and quiet design
- ▶ Simplified management
- ▶ Slim and robust design
- ▶ Low power consumption
- ▶ Lower total cost of ownership (TCO)
- ▶ Supported Protocols
t180WB supports the following protocols:
Citrix ICA/HDX, Microsoft RDP, VMware® Horizon View™

Atrust t180WB

System	t180WB
Processor	Intel Bay Trail 1.83GHz Quad Core
Memory	
System memory	2GB
Flash memory	8GB
Graphics	
Maximum resolution	Up to 1920 x 1200
I/O Interfaces	
I/O ports	1 DVI-I, 1 DVI-D, 3 USB 2.0 (2 Front, 1 Rear), 1 USB 3.0 (1 Rear), 1 RJ45, 1 headphone, 1 microphone, 1 DC IN, 1 Kensington lock slot
Networking	
Ethernet	10/100/1000Mb
Wireless LAN	802.11ac/a/b/g/n
Dimensions / Weight	
Dimensions	(W) 39.5 x (D) 103 x (H) 162.2 mm
Weight	472 g (approximate)
Environment	
Cooling	Fanless
Operating noise	No noise
Operating temperature	0°C ~ 35°C
Non-operating temperature	-30°C ~ 60°C
Operating humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating humidity (Rh)	5% ~ 95%
AC Adaptor	
Operating voltage range	100 ~ 240 VAC
Rated line frequency	50 ~ 60 Hz
Rated output current (max)	3A
Output voltage	+12V DC
Software	
Operating system	WE8S (Windows Embedded 8 Standard)
Management	Atrust Device Manager (ADM) / Atrust Client Setup (ACS)
Protocols	Citrix ICA/HDX, Microsoft RDP with RemoteFX, VMware® Horizon View™
Regulatory	CE, FCC, CB, NRTL, BSMI, VCCI

© 2014 Atrust Computer Corp. The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are trademarks of the Microsoft group of companies. Citrix and ICA/HDX are trademarks of Citrix Systems, Inc.. VMware and Horizon View are trademarks of VMware, Inc.. To learn more, visit www.Atrustcorp.com.