


Atrust



Thin Client Atrust t220L

Atrust t220L is a Linux-based thin client device especially designed for a client/server computing environment. Developed by Atrust, the ACS (Atrust Client Setup) software is also built in to help effective management of t220L. With the support of Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™ and VMware® Horizon View™, t220L can be used to create virtual and session-based desktop experiences from many remote desktop capable operating systems. t220L offers a rich computing experience where applications look, feel, and behave as local devices, including high-definition multimedia content.

- 1 Power LED**
Lights blue when t220L is powered on.
- 2 Power Button**
Press to turn on/off the client.
- 3 SSD LED**
Lights yellow when the SSD is accessed.
- 4 Headphone Port**
Connects to a set of headphones or speaker system.
- 5 Microphone Port**
Connects to a microphone.
- 6 USB 3.0 Port**
Connects to a USB device.
- 7 USB 2.0 Port**
Connects to a USB device.
- 8 Smart Card Reader**
Insert a smart card for identification, authentication (Manufacturing option).
- 9 RS-232 Port**
Connects to a serial port device.
- 10 Parallel Port (LTP)**
Connects to a parallel port device.
- 11 LAN Port**
Connects to a local area network.
- 12 DVI-I**
Connects to a monitor.
- 13 DVI-D**
Connects to a monitor.
- 14 USB 2.0 Port**
Connects to a keyboard, mouse, or USB device.
- 15 USB 2.0 Port**
Connects to a keyboard, mouse, or USB device.
- 16 Kensington Lock Slot**
Attach your t220L to a permanent object with the Kensington slot and a security cable.
- 17 DC IN**
Connects to an AC adaptor.

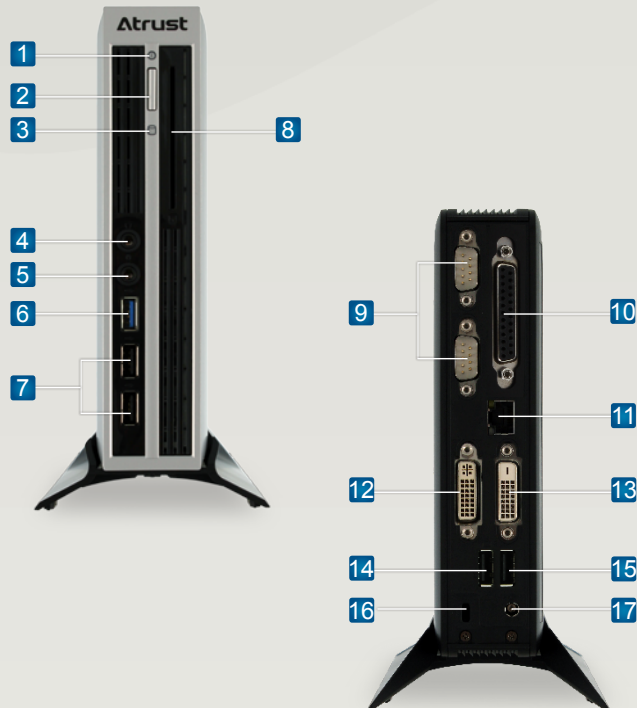

Atrust t220L Features

- ▶ Dual display support
- ▶ Smart card reader
- ▶ Durable and quiet design
- ▶ Simplified management
- ▶ Slim and robust design
- ▶ Low power consumption
- ▶ Lower total cost of ownership (TCO)
- ▶ Supported Protocols
t220L supports the following protocols:
Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™, VMware® Horizon View™



Atrust t220L

System	
Processor	Intel® Bay Trail Quad Core 2.0GHz
Memory	
System memory	2GB
Flash memory	4GB
Graphics	
Maximum resolutions	Up to 1920 x 1200
I/O Interfaces	
I/O ports	Front: 1 x USB 3.0, 2 x USB 2.0, 1 x Audio Out, 1 x Microphone, 1 x Smart card reader (Manufacturing option) Rear: 1 x DVI-I, 1 x DVI-D, 2 x USB 2.0, 2 x Serial ports, 1 x Parallel port, 1 x RJ-45, 1 x Kensington lock slot, 1 x DC IN
Networking	
Gigabit Ethernet	10/100/1000Mb
Dimensions / Weight	
Dimensions	(W) 179 x (D) 44 x (H) 179 mm
Weight	1.0 Kg (approximate)
Environment	
Cooling	Fanless
Operating noise	No noise
Operating temperature	0°C ~ 35°C
Operating humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating temperature	-30°C ~ 60°C
Non-operating humidity (Rh)	5% ~ 95%
AC Adaptor	
Operating voltage range	100 ~ 240 VAC
Rated line frequency	50 ~ 60 Hz
Rated output current (max)	3A
Output voltage	+12V DC
Software	
Operating system	Atrust Linux®
Management	Atrust Device Manager (ADM) / Atrust Client Setup (ACS)
Protocols	Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™, VMware® Horizon View™
Regulatory	
	CE, FCC, CB, NRTL, BSMI, VCCI
Options	
	WiFi : IEEE 802.11a/b/g/n (Manufacturing option) Smart Card Reader (Manufacturing option)

© 2014 Atrust Computer Corp. The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are trademarks of the Microsoft group of companies. To learn more, visit www.Atrustcorp.com.

Atrust

Atrust Computer Corp.

3F., 361, Fusing 1st Rd., Gueishan, Taoyuan County 333, Taiwan
T.+886-3-3288837 F.+886-3-3288973
sales@atrustedcorp.com www.atrustedcorp.com