Centerm C10 (V2)

- With Dual-Core ARM Processor
- Extended Display Support
- Multi-Protocol Support

Hardware

Specification		
Processor	CPU	ARM Cortex A9 Dual-Core 1.5GHz
Memory	RAM	1GB DDR3
Storage	eMMC	4GB
I/O Peripheral Support	DVI-I	x 1 (DVI-to-VGA adapter included)
	USB 2.0	x 5 (front x 1, rear x 4)
	RJ-45	x 1
Networking	LAN	x1 (10/100/1000 Base-T Fast Ethernet, RJ-45)
	WLAN	- Optional internal USB wireless module
Display Support	Resolution	DVI-I / DVI-D Up to 1920x1200@60Hz (1)
		VGA Up to 1920x1200@60Hz
	Extended display	Support
Audio	Line-out	- Output: 1/8-inch mini jack
	Mic-in	- Input: 1/8-inch mini jack
Physical Characteristics:	Dimension	Terminal Box 156.4mm(H) x 37mm(W) x 130mm(D)
	Net Weight	0.44kg
Mountings	Stand	Vertical feet standard
	Mounting Kit	Mounting VESA bracket
Power	Adapter	Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC
	Power Consumption	Less than 6 Watts
Environment	Operation Temperature	0℃ - 40℃
	Relative Humidity	30% to 90% non-condensing

Note:

(1) DVI-I to DVI-D and VGA video splitter cable, sold separately.

ADD:2/F #22 Star-net Science Plaza Juyuanzhou #618 Jinshan Road,Fuzhou Fujian China
ctsales@centerm.com www.centerm.com

Software

Firmware Features

OS	COSA 5.43
VDI / HSD Support	Citrix Receiver VMware View Client RDP 7
Management	Remote management, configuration, and upgrade through CCCM(Centerm Cloud Client Manager)

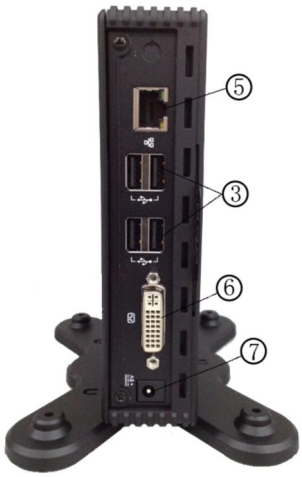

No.	Name	Icon
1	Mic-in	
2	Line-out	
3	USB 2.0 port	
4	Power button	
5	RJ-45	
6	DVI-I port	
7	DC 5V input	

Specifications subject to change without notice.

All trademarks are acknowledged and remain the property of their respective owner.

ADD:2/F #22 Star-net Science Plaza Juyuanzhou #618 Jinshan Road,Fuzhou Fujian China
ctsales@centerm.com www.centerm.com