

F310

Build No. 20190718

PROFILE

Powered by PX30 CPU, Centerm F310 is designed to support CPU-intensive and graphic demanding applications delivering smooth and outstanding performance in the standalone and virtual desktop environment.

FEATURES

➤ Powerful SoC performance

New generation Intel CPU drives up to superior digital media performance and enrich HD entertainment.

➤ Low TCO Solution

Low price, low power consumption and centralized management greatly reduces TCO.

➤ Multiple VDI protocol supported

Widely supports Citrix Workspace, and Microsoft RDP.

➤ Environment friendly


Low CO2 emission, low heat emission, noise-free and space saving.




Connectivity



Front Side

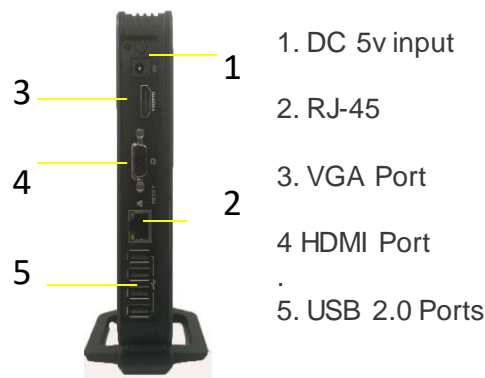

Rear Side (without Wi-Fi)

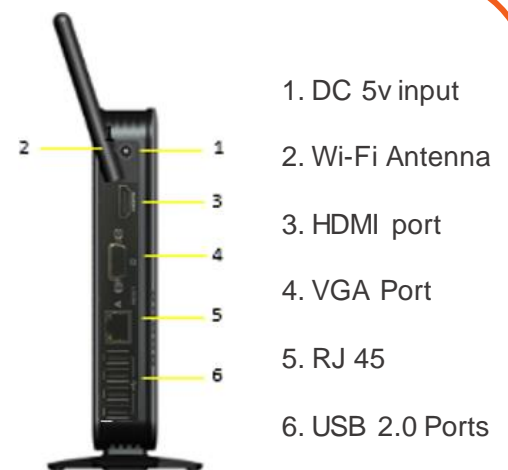

Rear Side (with Wi-Fi)

Standard Configuration

SYSTEM	
Processor	PX30
Available Operating System	TOSA ①
VDI/HSD Support	Citrix Receiver / Microsoft RDP 8 Compatible
Management	CDMS
MEMORY	
RAM (DDR3)	1GB
Storage (SSD)	4GB
DISPLAY	
Port	VGA x 1 , HDMI x1
Resolution	1920x1080
Color Depth	32 bits
NETWORK	
LAN	x 1 (10/100 Base-T Fast Ethernet, RJ-45)
I/O PERIPHERAL INTERFACE	
USB ports	x 5 (USB 2.0)
AUDIO	
Ports	Front: Line-out x 1 , Mic-in x 1, (1/8-inch mini jack)
DIMENSION	
Device (H x W x D)	131mm x 31.5mm x 167mm
Net Weight	0.5 kg
POWER	
Adapter	Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC.
Power Consumption	< 8 w
MOUNTING	
VESA Bracket	VESA Mounting Kit
Kensington Lock	Built-in Kensington security slot
ENVIRONMENT	
Cooling	Fan-less Convection
Operation Temperature	0°C to 40°C
Relative Humidity	30% to 90% non-condensing

①: Terminal Operating System for ARM (Linux).

SPECIFICATION

Optional Configuration

RAM (DDR3)	1GB (up to 4 GB)
Storage	SSD: up to 128GB
Wi-fi	SDIO WIFI