


Atrust




Thin Client Atrust t66

Atrust t66 is a Linux-based thin client device especially designed for a client/server computing environment. Developed by Atrust, the ACS (Atrust Client Setup) software is also built in to help effective management of t66. With the support of Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™ and VMware® Horizon View™, t66 can be used to create virtual and session-based desktop experiences from many remote desktop capable operating systems. t66 offers a rich computing experience where applications look, feel, and behave as local devices, including high-definition multimedia content.

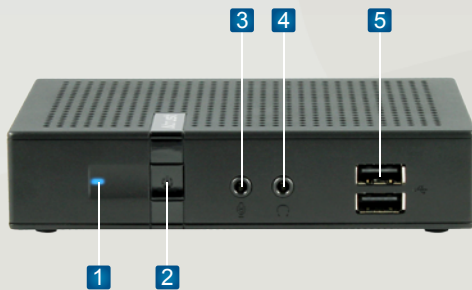

- 1 Power LED**
Indicates the status of power.
- 2 Power Button**
Press to turn on/off the client.
- 3 Microphone Port**
Connects to a microphone.
- 4 Headphone Port**
Connects to a headphone or a speaker system.
- 5 USB Port**
Connects to a USB device.
- 6 DC IN**
Connects to an AC adaptor.

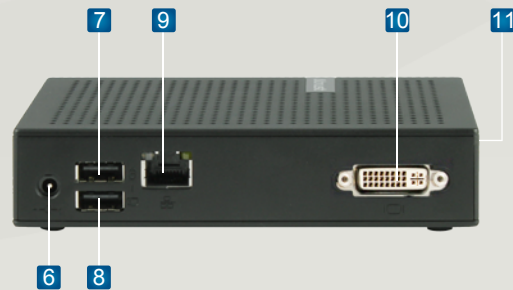

- 7 USB Port**
Connects to mouse.
- 8 USB Port**
Connects to keyboard.
- 9 LAN Port**
Connects to a host server through a LAN switch.
- 10 DVI-I Port**
Connects to a monitor.
- 11 Kensington Lock Slot**
Attach the t66 to a permanent object with the Kensington slot and a security cable.

Atrust t66 Features

- ▶ **Low total cost of ownership**
Additional computing access is as simple as adding more I/O devices. The total cost of ownership is then drastically reduced.
- ▶ **Slim and quiet design**
The slim design allows it to be mounted to the back of a monitor with a VESA mount. Together with its fanless design, t66 helps create a simple and noiseless workplace environment.
- ▶ **Simple click and play**
t66 connects to the host server with a Remote Desktop connection. Just click the shortcut for a Remote Desktop session, you can immediately start a session and enjoy the computing resources.
- ▶ **Rich remote user experience**
With Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™ and VMware® Horizon View™, t66 can provide a rich, efficient, and “local” computing experience for remote users.
- ▶ **Easy management and maintenance**
Since all computing tasks are mainly performed on a server, all hardware and software issues are significantly reduced on the client side. All user management, software installations, system management, and upgrades are done on a single server.



Atrust t66

System	
Processor	Freescale ARM® Quad Core 1.2GHz
Memory	
System memory	1GB
Flash memory	4GB
Graphics	
Maximum resolutions	Up to 1920 x 1080
I/O Interfaces	
I/O ports	Front: 2 x USB, 1 x Headphone port, 1 x Microphone port, Rear: 1 x DVI-I, 2 x USB, 1 x RJ-45, 1 x DC IN, 1 x Kensington lock slot
Networking	
Ethernet	10/100/1000Mb
Dimensions / Weight	
Dimensions	(W) 135 x (D) 93 x (H) 29 mm
Weight	278 g (approximate)
Environment	
Cooling	Fanless
Operating noise	No noise
Operating temperature	0°C ~ 35°C
Non-operating temperature	-30°C ~ 60°C
Operating humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating humidity (Rh)	5% ~ 95%
Power Consumption	Off mode: 0.14W (WOL disable), 0.45W (WOL enable), Idle mode: 4.0W, Average: 5.9W
Media License support	MP3, AAC, AVC/H.264 Codec, MPEG-4 Visual Decoder, VC-1, WMA/WMV
AC Adaptor	
Operating voltage range	100 ~ 240 VAC
Rated line frequency	50 ~ 60 Hz
Rated output current (max)	3A
Output voltage	+5V DC
Software	
Operating system	Atrust OS
Management	Atrust Device Manager (ADM) / Atrust Client Setup (ACS)
Protocols	Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™, VMware® Horizon View™
Regulatory	CB, FCC, CE, NRTL, BSMI, CCC, VCCI
Options	VESA Mount Kit: (W) 114 x (D) 60 x (H) 6 mm

© 2015 Atrust Computer Corp. The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are trademarks of the Microsoft group of companies. Citrix and ICA/HDX are trademarks of Citrix Systems, Inc.. VMware and Horizon View are trademarks of VMware, Inc.. To learn more, visit www.atrustcorp.com.